

ASAP INTERNATIONAL SDN. BHD. (1157980-X)

Tel: +6 03 5191 0166 Website: www.whyasap.com

No. 1, Jalan Sitar 33/6, Seksyen 33, 40400 Shah Alam, Selangor, Malaysia. Fax: +6 03 5191 0702 Email: info@whyasap.com

PRODUCT SPECIFICATION

			GENERA	L DESCRIPTION	
Product name			ASAP Medical Face Masks Type IIR		
Description			Ear Loop Face Mask 3-Ply with Filter		
Standard			EN 14683:2019		
Туре			IIR		
Item Code			30141		
Sterilization			Non-sterile		
Utilization			Intended to be used as isolation face mask, procedure mask and dental		
Fixation			Elasticated Cotton Loops		
Composition	Outer Layer	Outer	PP Spunbond Non-Woven		
		Model	Fabric STANDARD		
		Colour	Black		
	Filtration Layer	Middle	PP Meltblown Non-Woven		
		Colour	Fabric Black		
		Filtration	BFE \geq 98% in line with EN 14683:2019 Type IIR		
		Efficiency	PFE \geq 98% in line with ASTM F2100 Level II		
	Inner Layer	Inner	STANDARD (PP Spunbond)		
		Colour	Black		
	Loops	Fixed	2pcs of loops are sealed on Left and Right by Ultrasonic Machine		
		Way			
		Colour	Black		
		Material	+	UND type cotton loops	
		Location	A1	1 Loop on The Left Side Top	
			A2	1 Loop on The Left	
			A3 A4	Side Bottom 1 Loop on The Right	
	Nose Strip	Colour	Black		
		Material	Aluminium rod with plastic		
	Location		At the Centre of the Upper Part of Face Mask		
Characteristics	Fluid resistance		≥16kPa in line with EN 14683:2019 Type IIR		
	Microbial Cleanliness		≤30 cfu/g in line with EN 14683:2019 Type IIR		
	Differential Pressure		<60 Pa/cm2 in line with EN 14683:2019 Type IIR		

Doc No.: PS ASF201 (R1) Rev date: 23.08.2021





ASAP INTERNATIONAL SDN. BHD. (1157980-X)

Tel: +6 03 5191 0166 Website: www.whyasap.com

No. 1, Jalan Sitar 33/6, Seksyen 33, 40400 Shah Alam, Selangor, Malaysia. Fax: +6 03 5191 0702 Email: info@whyasap.com


DIMENSION

FRONT



COMPOSITION

INNER LAYER - PP Spunbond

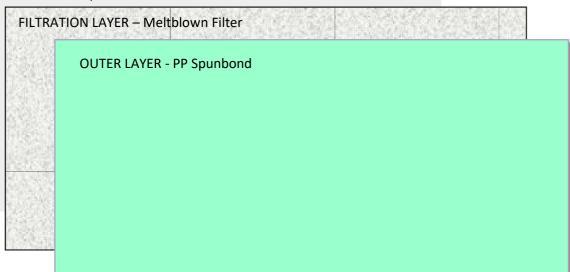

Doc No.: PS ASF201 (R1) Rev date: 23.08.2021





ASAP INTERNATIONAL SDN. BHD. (1157980-X)

 No. 1, Jalan Sitar 33/6, Seksyen 33, 40400 Shah Alam, Selangor, Malaysia.

 Tel: +6 03 5191 0166
 Fax: +6 03 5191 0702

 Website: www.whyasap.com
 Email: info@whyasap.com

PACKING & STORAGE					
PACKING DESCRIPTION					
Inner	50 pieces per box				
Carton	20 boxes per carton				
STORAGE					
Temperature	Avoid excessive heat 40°C, 104°F				
Humidity	Below 80%				
Sunlight	Keep Away From Direct Sunlight				
MANIPULATION CONDITIONS					
Message	This product is not designed for use as protection against any toxic dust, fumes, mists, gases, vapors				
Humidity	Not for use in spray paint operations				

ADDITIONAL SAFETY

To the best of our knowledge, the information contained herein is accurate. However, ASAP does not assume any liability whatsoever

for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility

of the user. Although certain are described herein, we cannot guarantee that these are the only hazards that exist

All materials may present unknown health hazards and should be used with caution.

Doc No.: PS ASF201 (R1) Rev date: 23.08.2021

